

Model 1200SJP

TELESCOPIC BOOM LIFTS

Performance


• Working Height	38.73 m
• Platform Height	36.73 m
• Horizontal Outreach	22.86 m
• Working Outreach **	23.51 m
• Swing (Continuous)	360°
• Platform Capacity (Restricted)	450 kg
• Platform Capacity (Unrestricted)	230 kg
• Platform Rotator (Hydraulic)	180°
• Jib - Overall Length	2.44 m
• Jib - Range of articulation	130° Vertical (+75°/-55°)
• JibPLUS® - Range of Articulation	180° Horizontal
A. Platform Size	0.91 m x 2.44 m
B¹. Overall Width (Axles Retracted)	2.49 m
B². Overall Width (Axles Extended)	3.81 m
C. Tailswing (working condition)	1.68 m
D. Stowed Height	3.05 m
E¹. Stowed Length	13.67 m
E². Transport length	10.64 m
F. Wheelbase	3.81 m
G. Ground Clearance	0.30 m
• Machine weight *	18,650 kg
• Maximum Ground Bearing Pressure	7.03 kg/cm²
• Drive Speed	5.2 km/h
• Gradeability	45%
• Axle Oscillation	0.30 m
• Turning Radius — Inside	4.39 m (Axles Retracted)
	6.86 m (Axles Retracted)
• Turning Radius — Outside	6.86 m (Axles Retracted)
	5.89 m (Axles Extended)




* Certain options or country standards may increase weight and/or dimensions.

** Incl. 0.65 m outreach beyond platform

Reach Diagram

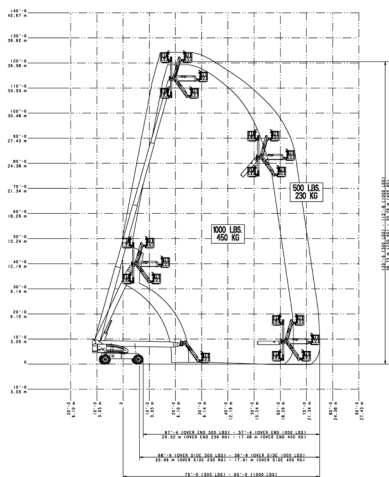

Dimensions

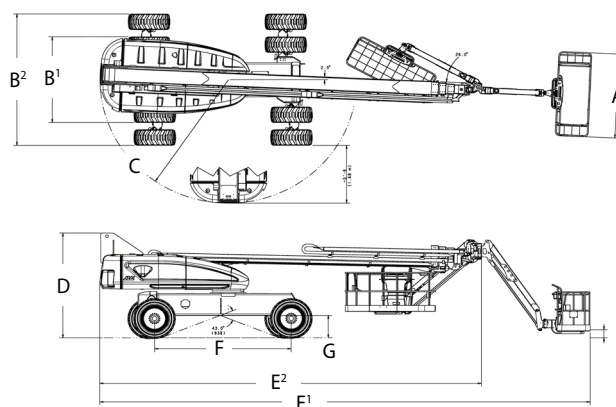

JLG®

IMPORTANT

JLG is continually researching and developing products and reserves the right to make modifications without prior notice. All data in this document is indicative. Certain options or country standards will increase weight. Specifications may change to meet country standards or with the addition of optional equipment.

JLG EMEA BV

Polaris Avenue 63
2132 JH Hoofddorp
The Netherlands
Phone: +31 (0)23 565 5665
www.jlg.com

Due to continuous product improvements, JLG Industries reserves the right to make specification and/or equipment changes without prior notification.

An Oshkosh Corporation Company