

Model 860SJ

TELESCOPIC BOOM LIFTS

Performance


• Working Height	28.21 m
• Platform Height	26.21 m
• Horizontal Outreach	22.86 m
• Working Outreach **	23.51 m
• Swing (Continuous)	360°
• Platform Capacity - Restricted	340 kg
• Platform Capacity - Unrestricted	230 kg
• Platform Rotator (Hydraulic)	180°
• Jib - Overall Length	1.83 m
• Jib - Range of articulation	130° (+70°/-60°)
A. Platform Size	0.92 m x 2.44 m
B. Overall Width	2.49 m
C. Tailswing (working condition)	1.42 m
D. Stowed Height	3.05 m
E. Stowed Length	12.2 m
F. Wheelbase	3.06 m
G. Ground Clearance	0.28 m
• Machine weight *	16,732 kg
• Maximum Ground Bearing Pressure	5.69 kg/cm ²
• Maximum Tyre Load	9163 kg
• Drive Speed 2WD	5.6 km/h
• Drive Speed 4WD	5.6 km/h
• Gradeability 2WD	25%
• Gradeability 4WD	45%
• Axle Oscillation	0.20 m
• Turning Radius - Inside	3.8 m 2WS
• Turning Radius - Outside	6.02 m 2WS




* Certain options or country standards may increase weight and/or dimensions.

** Incl. 0.65 m outreach beyond platform

Reach Diagram

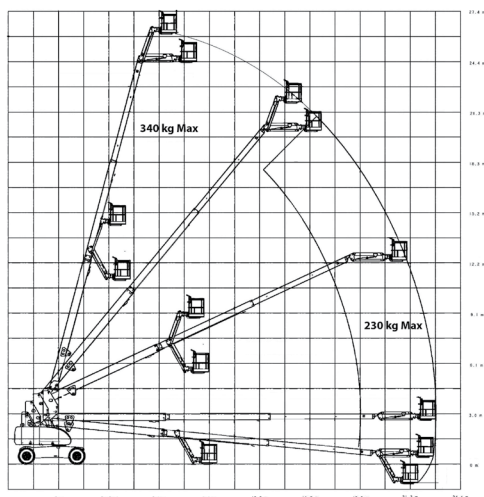

Dimensions

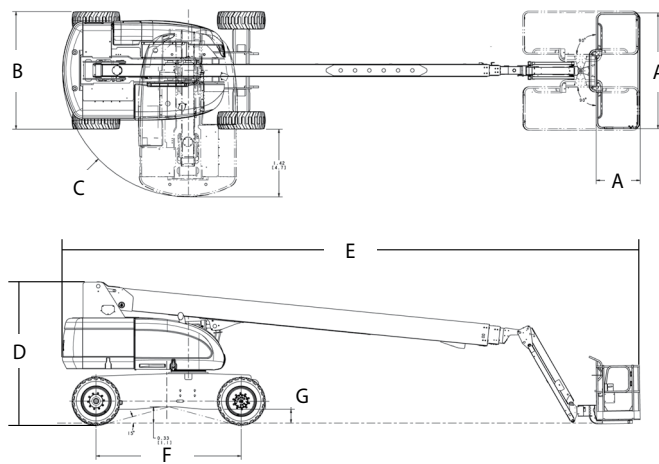

IMPORTANT

JLG is continually researching and developing products and reserves the right to make modifications without prior notice. All data in this document is indicative. Certain options or country standards will increase weight. Specifications may change to meet country standards or with the addition of optional equipment.

Due to continuous product improvements, JLG Industries reserves the right to make specification and/or equipment changes without prior notification.



JLG EMEA BV

Polaris Avenue 63
2132 JH Hoofddorp
The Netherlands
Phone: +31 (0)23 565 5665
www.jlg.com

An Oshkosh Corporation Company